



EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/729/161/02/20/0259 EXT 02/03/20

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer : SALOMON SAS
ZA DES CROISELETS 14 CHEMIN DES CROISELETS 74370 EPAGNY
METZ TESSY
France

Description

PPE Type : *an occupational footwear*

Product reference : XA FORCES 8 GTX EN

Article code : 412060 (Black) / 412664 (Slate Black)

Construction and material of outsole : Cemented EVA midsole / Rubber outsole

Pictures :



Reference standard : EN ISO 20347 : 2012

Classification : I **Category :** O3

Size range : 3.5 , 4.5 , 5.5 , 6.5 , 6 , 7 , 7.5 Slip resistance : SRC
**, 8 , 8.5 , 9 , 9.5 , 10 , 10.5 , 11 , 11.5 ,
12.5 , 13.5 , 14.5 UK**

Toecap nature : N/A **Insert nature :** Non Metallic

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file index 01 dated from March 2020

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by
Maxence DREVET
Project Certification Manager

Date of first issue : 25 March 2020
End of validity date : 25 March 2025



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.



Accreditation n° 5-0594
Scope available on:
www.cofrac.fr

www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726



SALOMON SAS

MANUFACTURER'S TECHNICAL FILE

Reference of the product : XA FORCES 8 GTX EN

Article code : 412060 (Black) / 412664 (Slate Black)

Technical file index : 01

Last update : March 2020

IDENTIFICATION

Reference of the product : XA FORCES 8 GTX EN
Article Code : 412060 (Black) / 412664 (Slate Black)
Major variant of model : XA FORCES MID GTX EN
Technical file index : 01
Last update : March 2020

Manufacturer :

SALOMON SAS

ZA DES CROISELETS 14 CHEMIN DES CROISELETS 74370 EPAGNY METZ TESSY

France

Tel : 450654141

Fax : 450654814

Factory :

POU CHEN CAMBODIA ENTREPRISE LTD

28-29 KM ROAD 33 KANDAL TOUL VILLAGE / KAMPONG TRACH 07101 KAMPOT

CAMBODIA

POUYUEN VIETNAM COMPANY LIMITED

D10/89Q NATIONAL ROAD 1A TAN TAO WARD BINH TAN DISTRICT HO CHI MINH CITY

VIETNAM

FOOTWEAR DESCRIPTION

Footwear description :

The classification of this footwear is: I : Footwear made from leather and other materials, excluding all-rubber or all-polymeric footwear

The design of this footwear is: C : half-knee boot

Visual description :

General view :



Outsole view :



Reference of the mould : SLM Y8-363

Range of sizes :

3.5 , 4.5 , 5.5 , 6.5 , 6 , 7 , 7.5 , 8 , 8.5 , 9 , 9.5 , 10 , 10.5 , 11 , 11.5 , 12.5 , 13.5 , 14.5 UK

Construction and material of outsole :

Cemented EVA midsole / Rubber outsole

Field of use :

L.E.A.F (Law Enforcement & Army Forces), to prevent outsole slipery, shoe perforation and electrostatic build up to eliminate the risk of electric /flammable.

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)				
		Applicable	Covered by	
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Standard
			<input checked="" type="checkbox"/>	Instruction for use
			<input checked="" type="checkbox"/>	Marking
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Standard
			<input checked="" type="checkbox"/>	Instruction for use
			<input type="checkbox"/>	Marking
§2.2	PPE is designed and manufactured in a way that perspiration resulting from use is minimised. Otherwise it must be equipped with means of absorbing perspiration.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Standard
			<input checked="" type="checkbox"/>	Instruction for use
			<input type="checkbox"/>	Marking
§2.4	If it is known that the design performance of new PPE may be significantly affected by ageing, the month and year of manufacture and/or, if possible, the month and year of obsolescence must be indelibly and unambiguously marked on each item of PPE placed on the market and on its packaging.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Standard
			<input checked="" type="checkbox"/>	Instruction for use
			<input checked="" type="checkbox"/>	Marking
§2.6	PPE is intended for use in potentially explosive atmospheres	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Standard
			<input checked="" type="checkbox"/>	Instruction for use
			<input checked="" type="checkbox"/>	Marking
§2.9	PPE incorporating components which can be adjusted or removed by the user	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Standard
			<input checked="" type="checkbox"/>	Instruction for use
			<input type="checkbox"/>	Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Standard
			<input checked="" type="checkbox"/>	Instruction for use
			<input checked="" type="checkbox"/>	Marking
§3.1.2.1	The PPE is intended to protect against falls due to slipping	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Standard
			<input checked="" type="checkbox"/>	Instruction for use
			<input checked="" type="checkbox"/>	Marking
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Standard
			<input checked="" type="checkbox"/>	Instruction for use
			<input checked="" type="checkbox"/>	Marking

FOOTWEAR CONSTITUTION

	Ref	Material	Color
UPPER	HAS W55 NMT 3131 WPN PFC FREE	Woven	Black / Slate Black
	TWIST BUCK WPN 2 MM	Cow Nubuck (split leather)	Black / Slate Black
	HULEX EDD WPN 1.2MM PFC FREE	Coated Synthetic	Black / Slate Black
	75A 80 HT	Rubber (on toe area)	Black / Slate Black
	65A 80 HT	Rubber (on upper medial side)	Black / Slate Black
COLLAR	HAS W55 NMT 3131 WPN PFC FREE	Woven	Black / Slate Black
	HULEX EDD WPN 1.2MM PFC FREE	Coated Synthetic	Black / Slate Black
	AOQ WEBBING 15MM	Synthetic	Black
TONGUE	ETC B0057 WPN	Woven	Black / Slate Black
	ET W5281	Lycra	Black / Slate Black
VAMP LINING	P GASKET	Knitwear carbone silver (vamp and quarter linings)	White
QUARTER LINING	ET L5249	Knitwear	Black
	DUCE II WPN 0.8 MM PFC FREE	Coated Synthetic	Black
INSOCK	ORTHOLITE 013 35C	PU Foam	Holly Green / Yellow / Red
	Cover ET L5249	Knitwear	Alloy
OUTSOLE	65A 180 WG ESD	Rubber	Black
	020 60C IM	EVA	Black / Slate Black
INSOLE	ENIGMA ZERO HT2 CONDUCTIVE (RED PRINT) 3.9MM	WOVEN	Natural
INSERT	ENIGMA ZERO HT2 CONDUCTIVE (RED PRINT) 3.9MM	WOVEN	Natural
DECORATIVE ELEMENTS	JC14010 - CU - 6MM	Top Hook	Black / Slate Black

PROTECTION SCOPE

Basic requirements :

This product has been designed to be an occupational footwear.

The technical rules are :

European Standard EN ISO 20344 : 2011 Personal protective equipment - test methods for footwear

European Standard EN ISO 20347 : 2012 : Personal protective equipment - Occupational footwear

It is a category II product

Requirement of the standard EN ISO 20347 : 2012 concerning the value of the coefficient of friction of ceramic tiles floor with detergent solution and steel floor with glycerol (SRC)

Requirement of the paragraph 5.8.1. Design of the standard EN ISO 20347 : 2012 concerning cleated outsole.

At the date of certificate, the product is in compliance with Annex XVII of European REACH regulation (n° 1907/2006 and revisions)


Additional requirements :

The additional requirements are :


- Closed seat region
- Antistatic footwear
- Upper : Water penetration and water absorption
- Penetration resistance

MARKING - PACKAGING

Information printed on the footwear :

- * Logo of the authorized representative
- * Logo 
- * Manufacturer's type designation
- * Postal address of manufacturer
- * Footwear's reference XA FORCES 8 GTX EN
- * Article code 412060 (Black) / 412664 (Slate Black)
- * Size
- * Year of manufacture and at least quarter
- * The number and year of the Standard used
- * The symbol(s) of the additional requirements

Marking example :

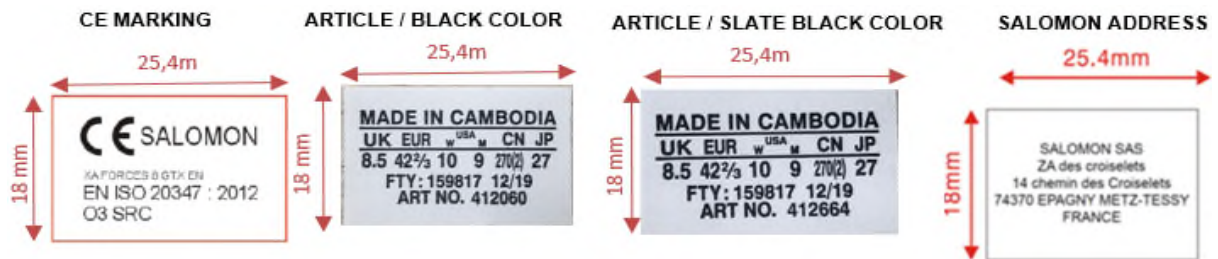

The location of marking is : Tongue and Collar

Method of marking on the footwear :

HF Plastic Label inner tongue and collar

Packaging :

Shoe Box

References of test reports performed in order to verify the compliance with the requirements of the technical rules :

Laboratory	Reference	Laboratory	Reference
RICOTEST	3721067/E	CTC	L190917946_1
CTC	D191123112_1	CTC	L190917947_1
CTC	L180917428_1	CTC	L190918239_1
CTC	L180917450_1	CTC	L191021349_1
CTC	L180917463_1	CTC	L191021351_1
CTC	L180917465_1	CTC	L191021354_1
CTC	L190101752_1	CTC	L191122314_1
CTC	L190202596_4	CTC	L191122315_1
CTC	L190406741_1	CTC	L191122316_1
CTC	L190611419_2	CTC	L200100773_1
CTC	L190714140_2	CTC	L200203503_1

MEANS OF CONTROL

Materials and components used in the finished shoe are considered in compliance with our standards, because

they are validated in incoming inspection.

For production we have detailed guidelines on minimum mandatory testing to be conducted on finished shoes during production of the product. Including the Determination of penetration force ISO 20344 : 2011 / Determination of footwear slip resistance SRA ISO 20344 : 2011 / Anti-Static Footwear ISO 20344 : 2011.

The test will be done on mini, medium, extrem sizes.

Guideline is visible on annex document Annex "Description Of The Quality Control On The Factory".

PPE subject to ageing :

Peremption period : 2 years when stored in appropriate conditions (humidity, temperature, clean , ventilated, light). Before use, the footwear shall be visually controlled, in case of deterioration the footwear must be scrapped (abrasion, cut, tear, ...).

Declaration of conformity :

Available on : www.salomon.com